

Lifts with wheel lifting supports flush with the floor

JOLLIFT MASTER L8

3000 kg maximum capacity 6615 lb

1440 mm lifting height 56.69"

130 mm minimum pit depth 5.11"

JOLLIFT 30 JP

3000 kg maximum capacity 6615 lb

1000 mm lifting height 39.37"

260 mm pit depth 10.23"

JOLLIFT 35

3500 kg maximum capacity 7717 lb

1360 mm lifting height 53.54"


300 mm pit depth 11.81"

Main features

Lifting by wheel lifting supports




Standard lifting by wheel lifting supports

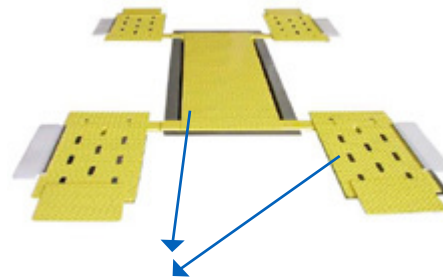

Non-slip diamond plate



EH




PH



PE

3 types of control unit available:
EH = electrohydraulic, PH = pneumo-hydraulic (on JO.30JP),
PE = pneumo-electrohydraulic

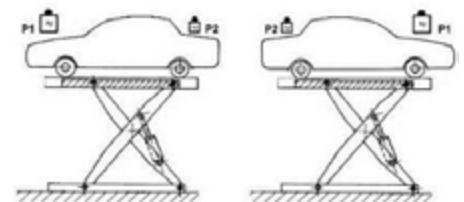

Reversible load, the heaviest side of the vehicle (motor side) on both sides of the lift

Safety devices



Safety device operating during lowering with acoustic signal activation (on JO.30JP and JO.35)




Mechanical safety catch



Emergency stop button with key against non-authorized use



Safety device operating during lowering with acoustic signal activation (on JO.MASTER L8)

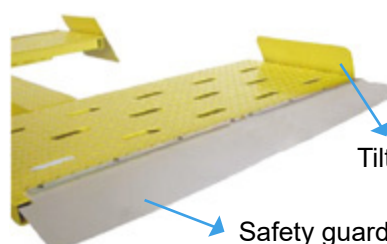

Tilting safety wheel lifting supports

Safety guard